




JOD Machinery Co., Ltd.

55 mm x 72 mm x 9 mm NTN 6811LLU deep groove ball bearings

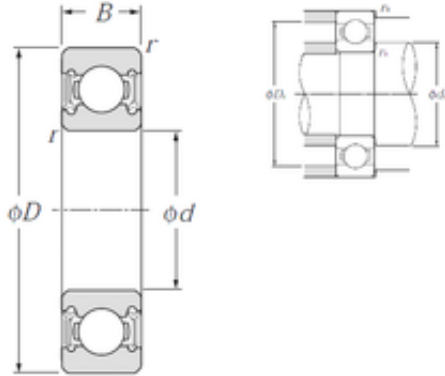

Bearing No. 6811LLU

6811LLU Bearing 2D drawings and 3D CAD models

Size	55x72x9 mm
Bore Diameter	55 mm
Outer Diameter	72 mm
Width	9 mm
d	55 mm
D	72 mm
B	9 mm
C	9 mm
r min.	0,3 mm
da min.	57 mm
da max	59 mm
Da max.	70 mm
ra max.	0,3 mm
Weight	0,083 Kg
Basic dynamic load rating (C)	8,8 kN
Basic static load rating (C0)	8,1 kN
Reference speed	4 800 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.081
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



JOD Machinery Co., Ltd.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	55MM Bore; 72MM Outside Diameter; 9MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6811JRLU/2AS
Weight / LBS	0.179
Bore	2.165 Inch 55 Millimeter
Outside Diameter	2.835 Inch 72 Millimeter
Outer Race Width	0.354 Inch 9 Millimeter
bore diameter:	55 mm
precision rating:	ISO Class 0
outside diameter:	72 mm
finish/coating:	Uncoated
overall width:	9 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round



JOD Machinery Co., Ltd.

cage material:	Steel
closure type:	Double Sealed
inner ring width:	9 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	9 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	4800 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	4800 RPM
dynamic load capacity:	8800 N
series:	68
static load capacity:	8100 N
manufacturer product page:	Click here